

W1G200-EC87-25

EC axial fan - ESM

sickled blades (S series)

ESM wall ring



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	W1G200-EC87-25		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Type of data definition		ml	
Speed (rpm)	min ⁻¹	1300	900
Power input	W	8	
Current draw	A	0.07	
Max. back pressure	Pa	23	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


Mass	1.0 kg
Size	200 mm
Motor size	55
Material of blades	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	V
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP55
Insulation class	"B"
Humidity (F) / environmental protection class (H)	H1+
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensation drainage holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Speed selection max/min - ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
Speed steps	2
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	VDE; CSA C22.2 no. 77; CCC; EAC; UL 1004-3

EC axial fan - ESM

sickled blades (S series)


ESM wall ring

Product drawing

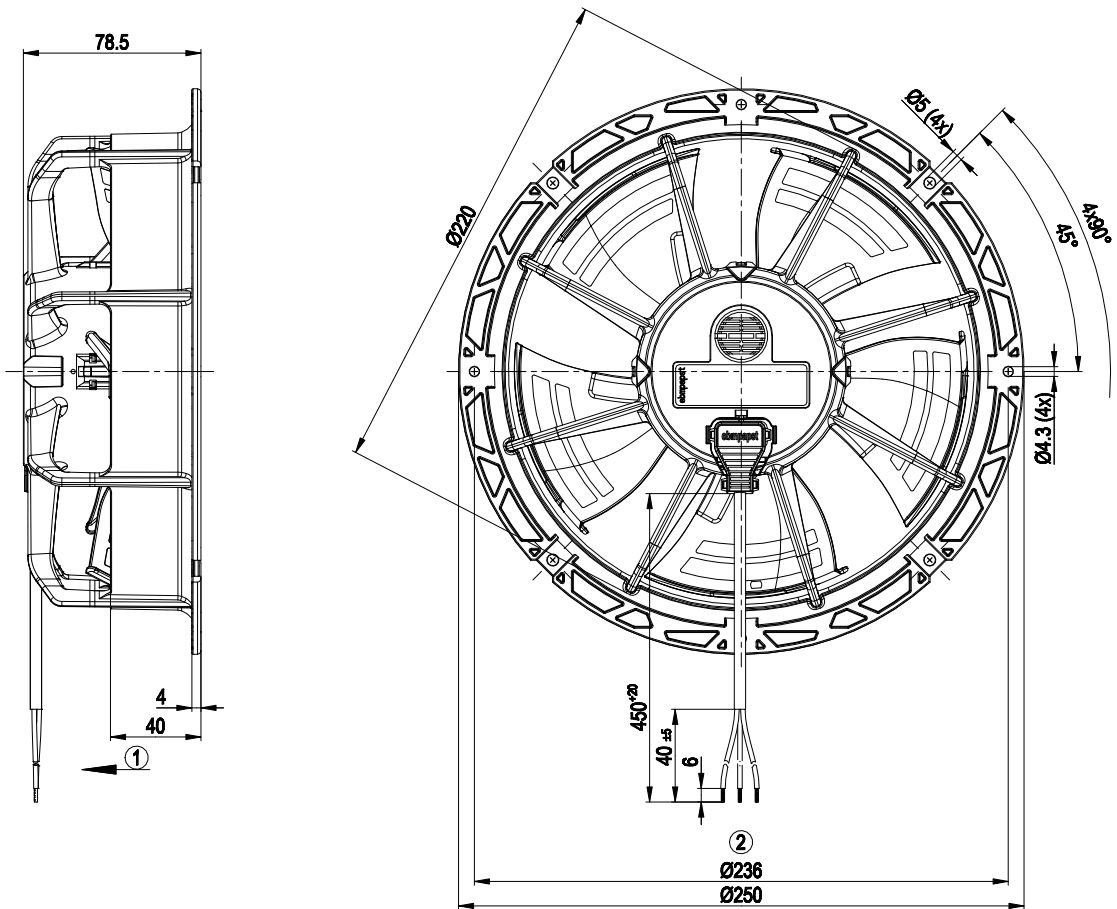


- 1 Direction of air flow "V"
- 2 Connection line PVC AWG20; 3 x brass lead tips crimped

Connection screen

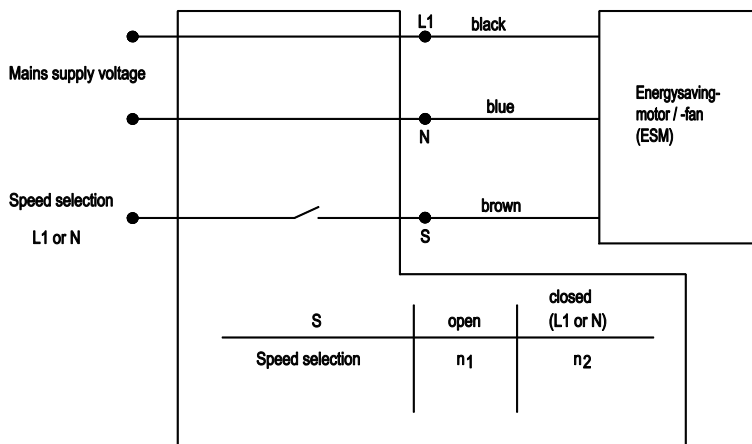

Charts: Air flow 50 Hz

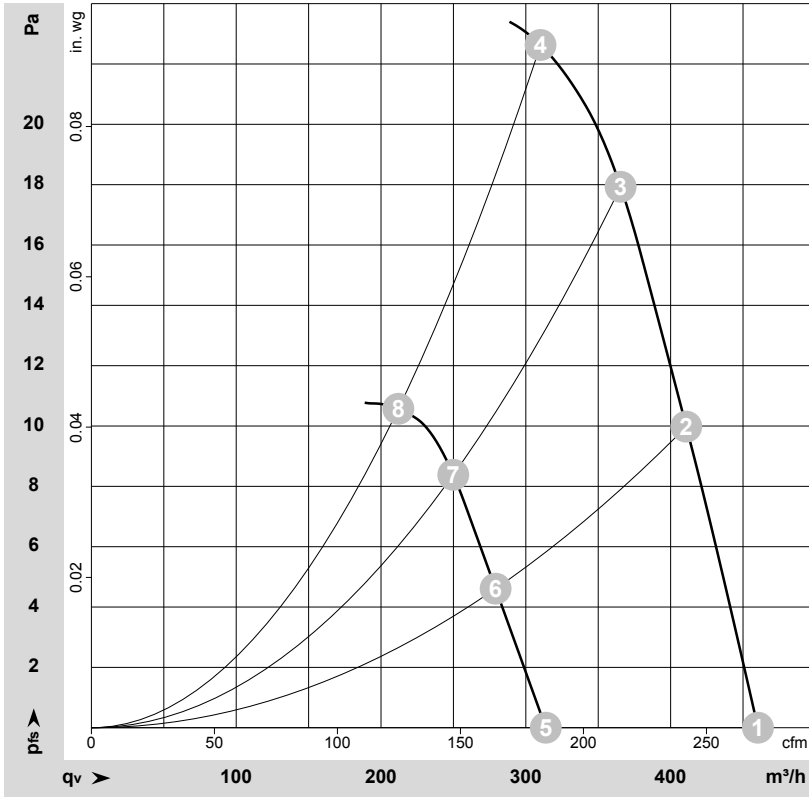

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-113354-1
Measurement: LU-113366-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Stage	Conn.	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
			V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1	1~	230	50	1300	7.0	0.06	42	50	460	0	270	0.00
2	1	1~	230	50	1300	8.0	0.07	41	49	410	10	240	0.04
3	1	1~	230	50	1300	8.0	0.07	40	48	365	18	215	0.07
4	1	1~	230	50	1300	8.0	0.07	43	51	310	23	180	0.09
5	2	1~	230	50	900	3.00	0.03	33	41	315	0	185	0.00
6	2	1~	230	50	900	4.0	0.04	32	41	280	5	165	0.02
7	2	1~	230	50	900	4.0	0.04	31	40	250	8	145	0.03
8	2	1~	230	50	900	4.0	0.04	33	42	210	11	125	0.04

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
q_v = Air flow · p_{fs} = Pressure increase

